


PQC2002C SERIES (20CH * 2L)



龐誼科技股份有限公司

Palm Technology Co., Ltd.

EXTERNAL DIMENSION

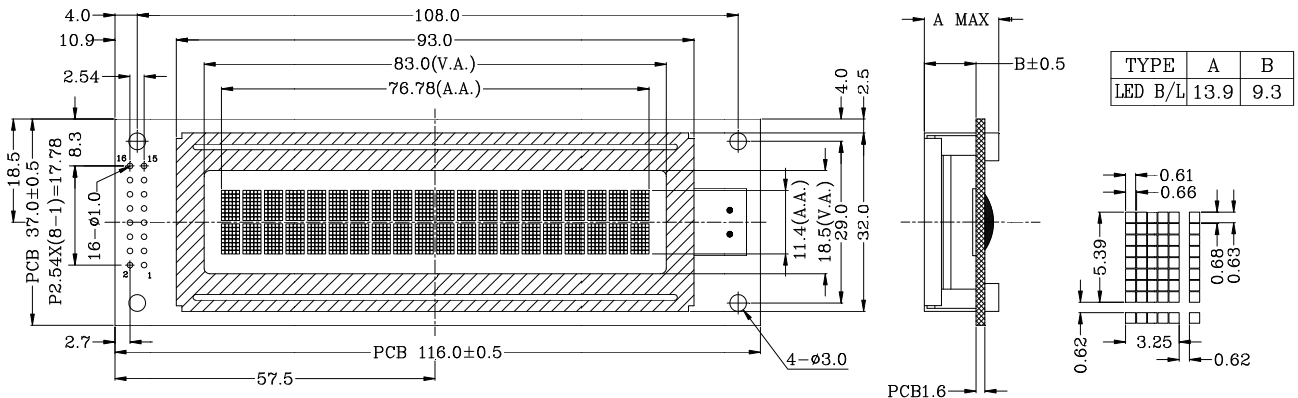

- SPECIFICATIONS
1. DISPLAY TYPE: STN/TRANSMISSIVE/POSITIVE/Y-G
 2. LCD DRIVING VOLTAGE: 4.7V
 3. LOGIC VOLTAGE: 5.0V
 4. VIEWING DIRECTION: 6° CLCOK
 5. OPERATING TEMP: -20°C~70°C
 6. STORAGE TEMP: -30°C~80°C
 7. DRIVE MODE: 1/16 DUTY, 1/5 BIAS
 8. BACKLIGHT: YELLOW GREEN/BOTTOM BACKLIGHT/5.0V
 9. OTHER:



DETAIL DOTS

SCALE: 3:1

MECHANICAL TOL. ±0.3 UNLESS SPECIFIED

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8
SYMBOL	VSS	VDD	V0	RS	R/W	E	DB0	DB1
PIN NO	9	10	11	12	13	14	15	16
SYMBOL	DB2	DB3	DB4	DB5	DB6	DB7	LED-	LED+

BLOCK DIAGRAM

