

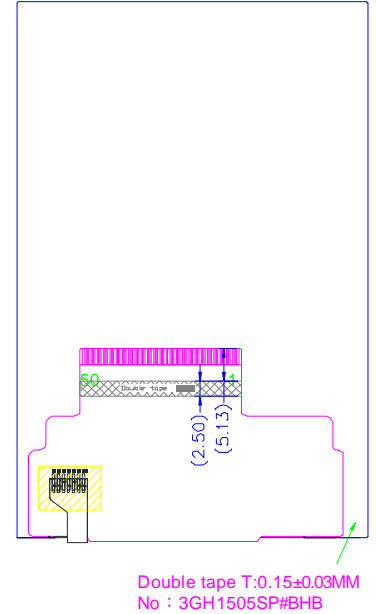


PT0353248-C3 SERIES (320*RGB*480 DOTS)

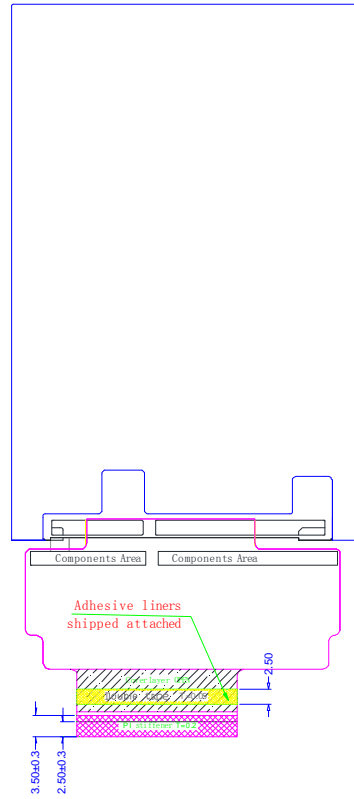

魔誼科技股份有限公司
Palm Technology Co., Ltd.


EXTERNAL DIMENSION

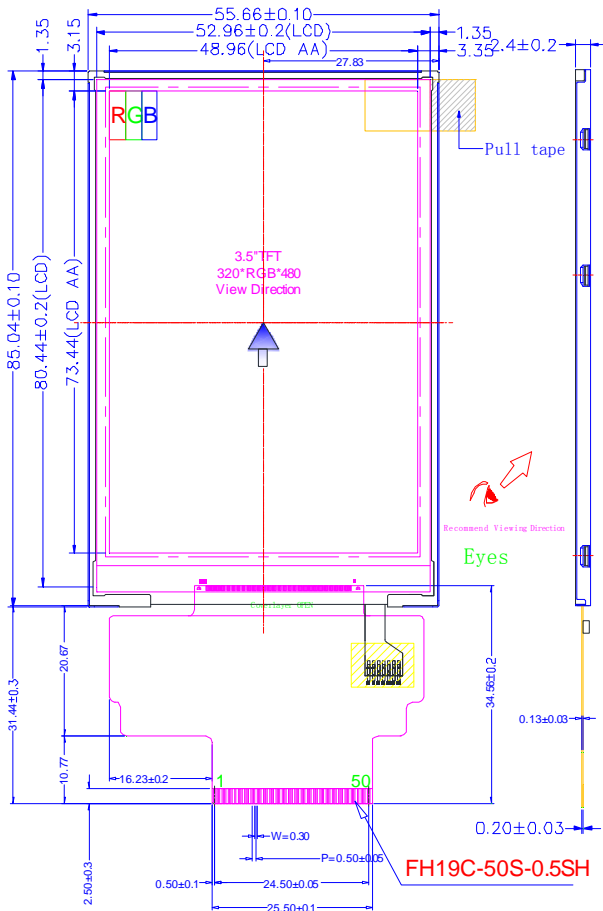


FPC bent figure drawing
Pre-bent shipped but not stuck onto bezel

NOTE:

1. DISPLAY TYPE: 3.5" TFT, TRANSMISSIVE
2. DRIVER IC: HX8357C
3. VIEWING DIRECTION: 6 o'clock
4. OPERATING TEMPERATURE: -20 C +70 C.
5. STORAGE TEMPERATURE: -30 C +80 C.
6. BACKLIGHT TYPE: 6 WHITE LEDS.
7. LED: If=20.0mA/LED (CONSTANT CURRENT).
8. (...) REFERENCE DIMENSION.
9. "☒" ICON MEAN CRITICAL DIM
10. MUST MEET THE REQUIREMENT OF ROHS

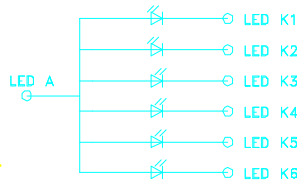

B/L CIRCUIT DIAGRAM
If=120mA Vf=3.3V typ

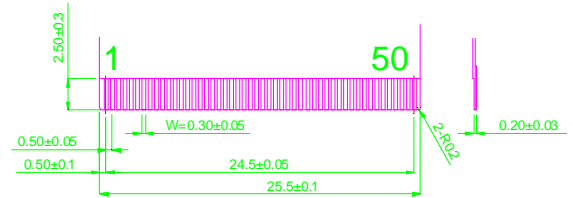

FH19C-50S-0.5SH(2:1)

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	GND	HSYNC	VSYNC	DE	PCLK	GND	RESET	DB23	DB22	DB21
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	DB20	DB19	DB18	DB17	DB16	DB15	DB14	DB13	DB12	DB11
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	DB10	DB9	DB8	DB7	DB6	DB5	DB4	DB3	DB2	DB1
PIN NO	31	32	33	34	35	36	37	38	39	40
SYMBOL	DB0	GND	SDO	SDI	SCLK	CS	GND	VCC	VCC	LEDK4
PIN NO	41	42	43	44	45	46	47	48	49	50
SYMBOL	LEDK3	LEDK2	LEDK1	LEDA	GND	LEDK5	LEDK6	GND	GND	VCC