



EXTERNAL DIMENSION

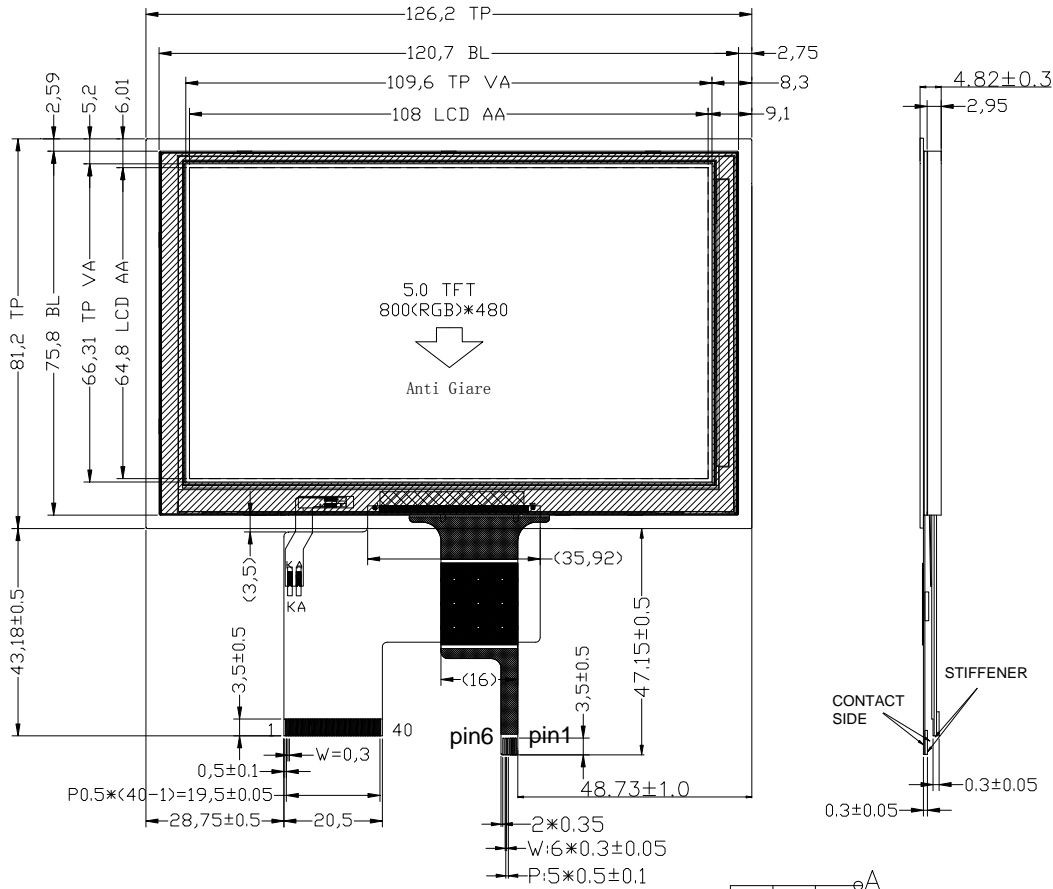

- NOTES:
1. DISPLAY TYPE: TFT-LCD, TRANSMISSIVE, NORMAL WHITE
 2. VIEW DIRECTION: 12 O' CLOCK
 3. OPERATING TEMP: -20° C~+70° C
 4. STORAGE TEMP: -30° C~+80° C
 5. BACKLIGHT brightness: 800cd/m2 (MIN) / 1000cd/m2 (TYP)
 6. DRIVER IC: ILI6126C ILI5960D
 6. OTHER TOLERANCE: ±0.2mm

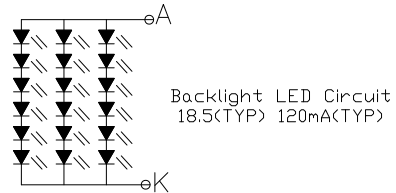

PIN CONNECTIONS

TFT LCD MODULE

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	VLED-	VLED+	GND	VDD	R0	R1	R2	R3	R4	R5
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	R6	R7	G0	G1	G2	G3	G4	G5	G6	G7
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	B0	B1	B2	B3	B4	B5	B6	B7	GND	DCLK
PIN NO	31	32	33	34	35	36	37	38	39	40
SYMBOL	DISP	HSYN	VSYN	DE	NC	GND	NC	NC	NC	NC

CAPACITIVE TOUCH

PIN NO	1	2	3	4	5	6
SYMBOL	RST	INT	VDD	GND	SCL	SDA